


## TECHNICAL SHEET




The edge insulation Slim 5 absorbs floor expansions and acts as thermo-acoustic insulation for the walls.  
Thickness 5 mm, height 50 mm.  
Packaging: 25 m roll.



**Code**

1200050

## DIMENSIONS

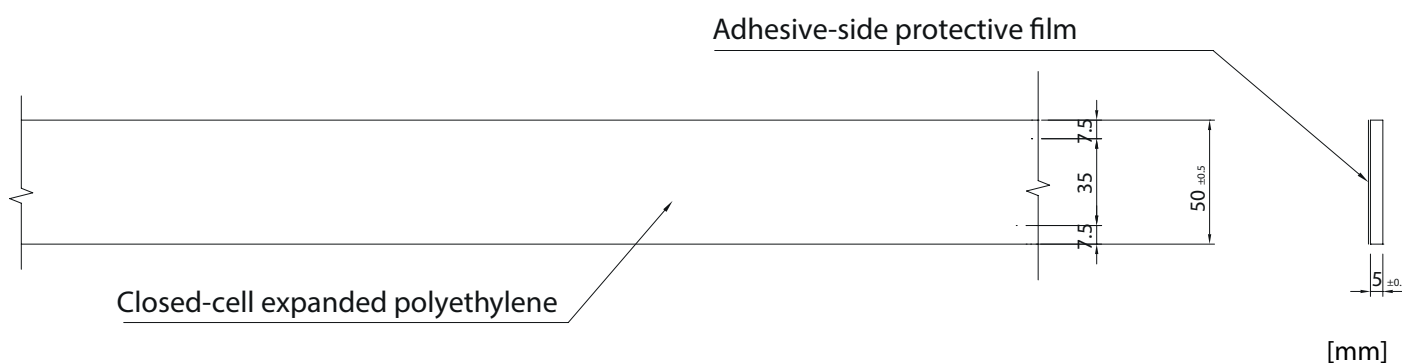

## TECHNICAL CHARACTERISTIC

Characteristic	Value	Unit
Density	30 ÷ 33	kg/m <sup>3</sup>
Thermal conductivity coefficient	0,035 a 10 °C 0,039 a 40 °C	W/(m · K)
Maximum operating temperatures	-20 ÷ +80	°C
Impact insulation in accordance with EN ISO 10140-3, based on certificates and laboratory tests carried out laboratory tests	25,5	ΔLw (dB)
Compressive stress at 10 % deformation according to UNI EN 826, based on certificates and laboratory tests carried out	13,002	kPa
Toxicity standards AFNOR NF F 16-101-1988	Test report on the toxicity and Smoke Opacity CSI Test Report no. DC01/494F05 of 07/07/05	
Dynamic rigidity	43,0	MN/m <sup>3</sup>

