


TECHNICAL DATA SHEET



Zero Level AD Panel is made of regenerated plastic material with high density and 1-mm thickness; it ensures a solid base in the building site and can be walked on. These panels have a tongue along the perimeter to connect them for accurate, secure join. Adhesive layer on the back, moulded surface with studs of 16 mm for 12-mm pipe laying, pipe spacing of 40,5 mm. Size: 1215x810x18 mm.

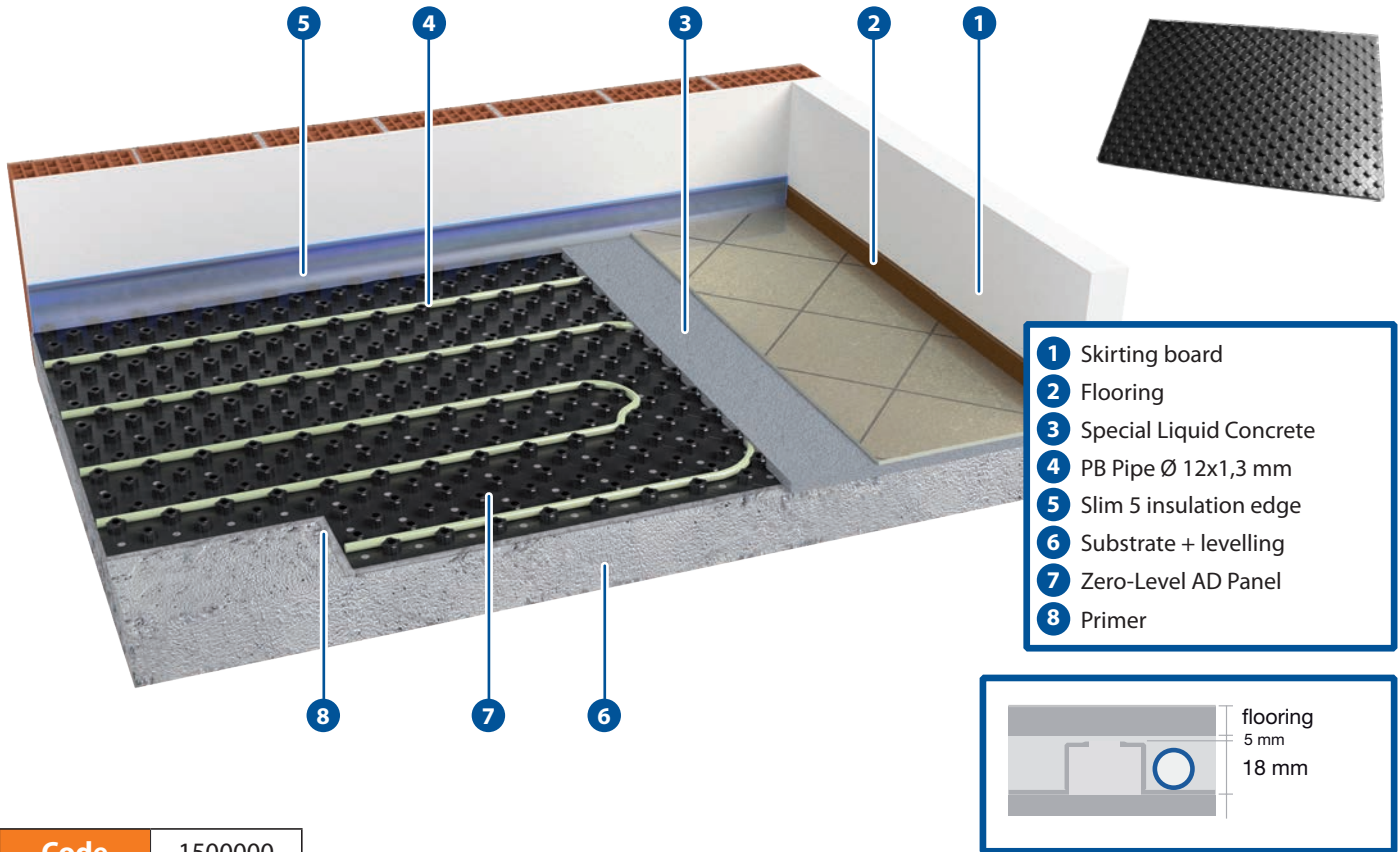

Code 1500000

Panel Features

Features	Value	Unit	Standard
Dimensions	1215x810x18	mm	
Thickness	1	mm	
Fluidity Index	4 ÷ 6	g/10min	ISO 1133
Vicat softening temperature	99	°C	ISO 306
Density at 23°C	1,02 ÷ 1,05	g/cm ³	ASTM D792
Izod Impact Resistance at 23 °C	6 ÷ 8	KJ/m ²	ISO 180

Glue Specifications

Features	Value	Unit	Method
Viscosity according to Brookfield parameters at 160 °C	5.500	mPa/s	ICAT MI 13
Softening temperature	80	°C	ICAT MI 12
Open time at 160 °C	Limitless	s	ICAT MI 10