


TECHNICAL DATA SHEET



Rapid US is a plastic material panel suitably covered with a screen-printed non-woven fabric sheet with a 50 mm pitch, which acts as a support for the PE-RT pipe equipped with a hook-and-loop system that can be fixed to the panel without the aid of clips. The panel is presented in sheets folded in two with useful dimensions of 2x1 m, with a small footprint and easy to transport due to both the low volume involved and its light weight. The system is suitable for low-inertia systems, occupying a total thickness of only 31 mm.

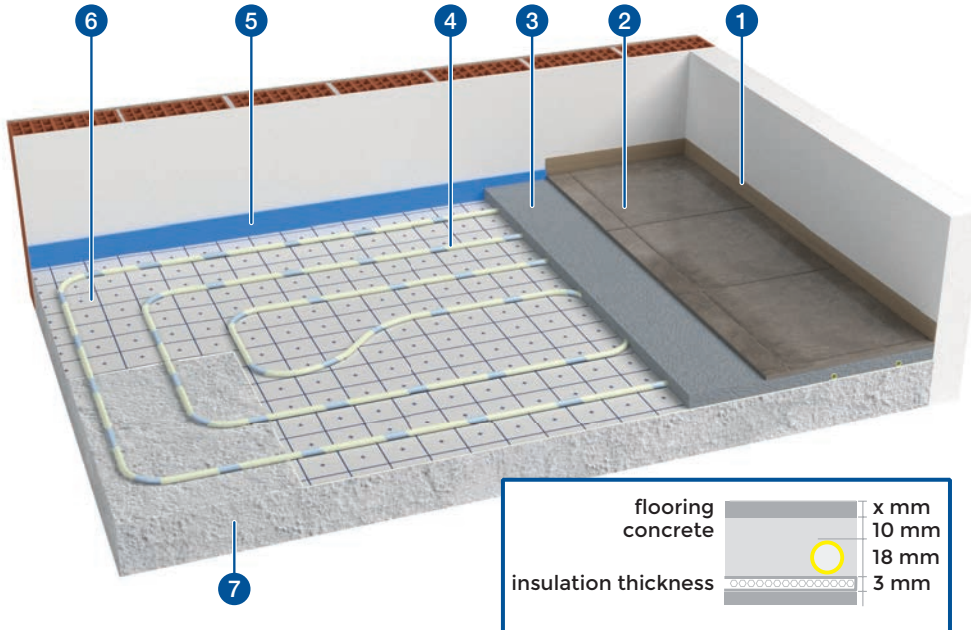

- 1 Skirting board
- 2 Flooring
- 3 Concrete
- 4 Rapid PE-RT Ø 17-13 pipe
- 5 Slim 5 perimeter belt
- 6 Rapid US panel
- 7 Structural base + levelling

Size (mm)	Code
1000x2000x3	1201008

PROPERTIES	VALUE	UNIT
Necessary Length	2000	mm
Necessary Width	1000	mm
Total Thickness	3	mm
Thermal resistance	0,071	(m ² •K)/W
Maximum applicable surface load	≤ 5	kPa
Reaction to fire class (DIN EN 13501-1)	E	
Panel weight	1,9	Kg
Packaging	20	m ²

This document may be subject to change. Through the QR-Code you can check the latest available update. Manual changes are prohibited.

