

## TECHNICAL SHEET




Completely insulated and hermetically sealed reduction in EPP useful for connecting the pipes and molded parts of the EPE system.

The reduction helps to minimize heat loss and prevents condensation, and is therefore suitable for air inlet and outward connections. It guarantees low pressure drops thanks to the smooth internal surface.

Permissible operating temperature: -25 to 80 ° C. Thermal conductivity 0,037 W/(m·K). Single pack.



	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	D <sub>4</sub>	L	Peso	Cod.
<b>DN 160-125</b>	190	160	155	125	170	0,08	7046245
	[mm]					[Kg]	

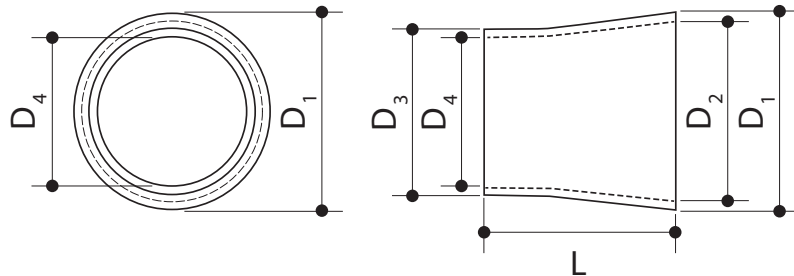

## INSTALLATION

Example of installation of the reduction with two EPE pipes

