
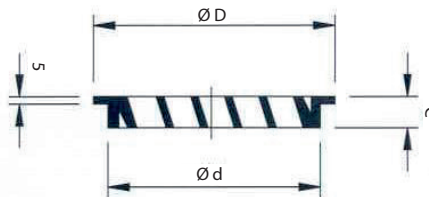


TECHNICAL SHEET | SCHEDA TECNICA

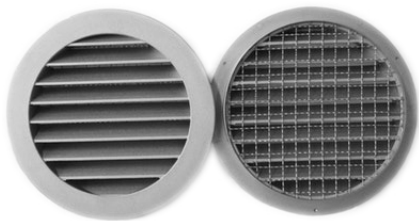

Round outdoor ventilation grille in die-cast aluminium.
Equipped with removable wire mesh.
Single pack.

Griglia di aerazione rotonda esterna in alluminio pressofuso con rete metallica estraibile.
Confezione singola.

DN	Ø d	Ø D	C	Cod.
125	124	155	25	7046370
160	159	190	25	7046371
200	199	230	25	7046372
[mm]				

PRODUCT PROPERTIES

Aluminum circular grilles are used in air distribution systems, as external air inlet or outlet terminals.

CONSTRUCTION

The grid is made of powder-coated aluminum (RAL9006), and is supplied with a galvanized steel mesh with a 10x10 mm mesh.
This grill is not suitable for use in saline environments.

INSTALLATION

The circular grid must be installed on holes / pipes with a compatible diameter (see table DN value) and is fixed using nails or screws using the pre-holes present in the internal edge.

MAINTENANCE

The grid must be cleaned every 3 months to prevent clogging.

PROPRIETA' DEL PRODOTTO

Le griglie circolari in alluminio sono utilizzate negli impianti di distribuzione dell'aria, come terminali esterni di immissione o espulsione dell'aria.

COSTRUZIONE

La griglia è realizzata in alluminio, verniciata a polvere (RAL9006), ed è fornita di rete in acciaio zincato con maglia di dimensione 10x10 mm.


Questa griglia non è adatta per utilizzo in ambienti salini.

INSTALLAZIONE

La griglia circolare va installata su fori/tubazioni con diametro compatibile (vedi tabella valore DN) e viene fissata tramite chiodi o viti utilizzando i prefori presenti nel bordo interno.

MANUTENZIONE

La griglia deve essere pulita ogni 3 mesi per prevenire eventuali intasamenti.

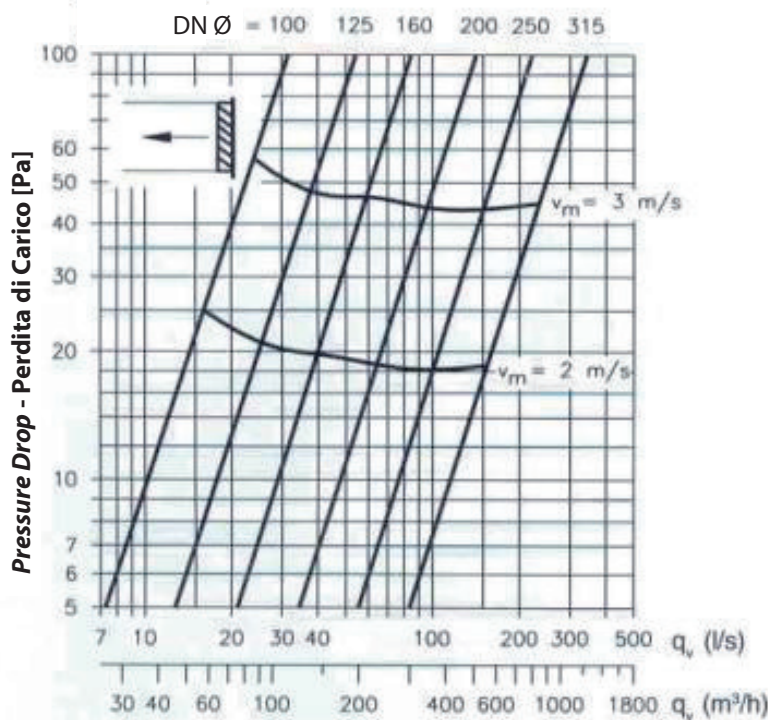

Air Flow Rate - Portata Aria